



⑪ Publication number : **0 642 250 A2**

⑫ **EUROPEAN PATENT APPLICATION**

⑲ Application number : **94305675.4**

⑤① Int. Cl.<sup>6</sup> : **H04M 3/42, H04M 3/50**

⑳ Date of filing : **01.08.94**

③① Priority : **03.08.93 US 100944**

④③ Date of publication of application :  
**08.03.95 Bulletin 95/10**

⑥④ Designated Contracting States :  
**CH DE FR GB LI**

⑦① Applicant : **DICTAPHONE CORPORATION**  
**3191 Broadbridge Avenue**  
**Stratford, CT 06497-2559 (US)**

⑦② Inventor : **Daly, Daniel F.**  
**194 Barn Hill Road**  
**Monroe, CT 06468 (US)**

Inventor : **Swick, Robert S.**  
**168 Margherita Lawn**  
**Stratford, CT 06497 (US)**

Inventor : **Henits, John**  
**12 Country Way**  
**Bethel, CT 06801 (US)**

Inventor : **Leung, Keith K.W.**  
**106 Longview Road**  
**Monroe, CT 06468 (US)**

Inventor : **Morlando, Salvatore J.**  
**15 Jamestown Road**  
**Easton, CT 06612 (US)**

Inventor : **Messologitis, Constantine P.**  
**106 West Rutland Road**  
**Milford, CT 06460 (US)**

⑦④ Representative : **Cook, Anthony John et al**  
**D. YOUNG & CO.**  
**21 New Fetter Lane**  
**London EC4A 1DA (GB)**

⑤④ **Modular digital recording logger.**

⑤⑦ A modular digital recording system that records audio on digital audio tapes has been conceived that provides redundancy and the ability to record audio while listening to portions of audio that had been recorded on the DAT. The system uses a hard disc 32a that receives audio for recording simultaneously with the DAT. When one wishes to listen to a voice message, one can activate the hard disc to listen to a particular message while the DAT is still recording. The system is modular so that the capacity can be expanded as required. The system includes a LAN adapter so that the system can provide networking access.

In the field of voice processing, there are circumstances in which it is necessary that audio, such as conversations, be recorded and the time when such recordings took place be established. Systems capable of providing this requirement have been commercially available for a long period and are referred to as recording loggers, or loggers for short. Prior systems have worked rather well, but were based for a long time on analog technology. Because of this, the prior logger systems were physically large and the tapes that recorded audio for archival purposes were also large, thus requiring a large amount of storage space.

To overcome these drawbacks of prior analog loggers, digital loggers have recently been developed and offered commercially. Although these commercially available digital loggers yielded advantages over the prior analog loggers, they still had shortcomings in terms of networking expandability and voice capacity. It clearly would be advantageous to provide a digital logger that overcomes these disadvantages of prior digital loggers. In addition, it would be desirable of having a digital logger that is modular in construction so that the capacity of such logger can be increased in a convenient and economic manner and software can be upgraded as required.

A modular digital recording logger has been conceived that provides advantages not only over prior analog loggers, but prior digital recording loggers as well. The modular digital logger of the instant invention has a basic unit that comprises four primary components, an audio card that monitors audio sources (such as telephones), a main card that processes audio, a host computer that controls the overall operation and memory.

The audio card serves the main functions of communicating with the audio sources, converting received analog signals to digital signals and directing the audio signals through a time division multiplexed (TDM) bus to the main, or application card.

The application card communicates with the audio card through the TDM bus to monitor the status of the audio cards, when there is more than one, and determine which needs service. The application card packages received data, executes speech compression and expansion, performs VOX and performs other functions. The application card is attached to an ISA bus as are a computer, such as a personal computer, a LAN adapter and a SCSI adaptor. The computer stores the operating instructions and supervises and coordinates the activities of the other components of the logger system. The SCSI (small computer system interface) adaptor is in communication with at least one digital tape drive (DAT) and at least one hard disc. The system is modular so that the capacity of the system can be expanded as required readily at a minimum cost and software can be modified conveniently as desired. In addition, the LAN adapter allows each logger of the instant invention to be part of

a networked system that include other digital loggers and workstations.

In the drawings:-

FIG 1 shows a functional block diagram of a modular digital recording logger in which the invention can be practiced;

FIG 2 is a plan view of the components of the logger of FIG 1 shown in a housing; and

FIG 3 is a block diagram showing a plurality of loggers of FIG 1 in a network.

With reference to FIG 1, a digital modular recording logger is shown at 10 and includes a pair of audio circuit boards 12a, 12b which will hereinafter be referred to as audio cards. Only two audio cards 12 are shown, but a larger number of audio cards can be included in the system. For example, where thirty two channels are required, eight digital audio cards 12 would be required in accordance with the description that follows. The audio cards 12a, 12b are in communication with an audio application processing circuit board 14, which hereinafter will be referred to as the main card, through a time division multiplexed (TDM) bus 16. Once more, only one main card 14 is shown and described, but it will be appreciated where more audio cards are required, such as eight more main cards (e.g. four) also may be needed, depending upon the particular architecture of the audio cards and main cards. The main card 14 communicates with a personal computer 20 through an ISA bus 22. The computer 20 has a RAM 23 attached thereto and is in communication with a small computer system interface (SCSI) adaptor 18 through the ISA bus 22. The SCSI host adaptor 18 can be any of a number of commercially available adaptors such as an Adaptec 1542 adaptor available from Adaptec Corporation. The combination of the CPU 20 and RAM 23 can be any personal computer such as an IEEE 996 standard PC/AT. Also tied to the CPU 20 is a clock 34. The LAN adapter 24 provides the opportunity for network connection as will be described hereinafter with reference to FIG 3.

The SCSI host adaptor 18 communicates with a pair of tape drives 26a, 26b each of which is capable of driving a digital audio tape (DAT) 28a, 28b, respectively. The tape decks 26a, 26b are in communication with the SCSI host adaptor 18 through an SCSI bus 30. Also in communication with the SCSI host adaptor 18 through the SCSI bus 30 are a pair of disc drives 32a, 32b. The number of DAT's 28 and disc drives 26, can vary to customize the system 10 to the operative channel requirements, but where the tapes are redundant, only one disc drive could be used.

A multiplicity of audio sources such as telephones 36a, 36b, 36c...36n are shown which can represent any telephone outside of the system 10 that is able to communicate with the system 10 through communication lines 37. The system 10 can monitor a number of different types of audio devices such as a

private branch exchange (PBX) 38 to which a plurality of telephones 40a and 40b are connected. Other audio sources include radio, central office lines, microphones, speakers and the like. As shown, the audio card 12a has four ports and is able to communicate with a lines 39 (channels) connecting the telephones 40a with the PBX so as to receive audio therefrom. More specifically, the audio cards 12a, 12b receive audio from two sources, an internal telephone 40 and an external telephone 36. The audio card 12b also has four ports, with three of the ports communicating with communication lines 39b leading to telephones 40b and PBX, but one of the ports is connected to a speaker 41 thereby allowing messages to be heard as will be described hereinafter. The communication lines 39 transmit audio from the PBX 38 and telephones 40 to the audio cards 12.

The audio cards 12 can be of the type shown and described in co-pending European patent application number 550275 and entitled Audio Circuit Board for a Modular Digital Voice Processing System which is hereby incorporated by reference. The system 10 can be activated in one of two ways, either through the audio card detecting a telephone 40 going off hook, or through a VOX operation controlled by the main card 14 which is activated upon the main card receiving an audio signal from one of the audio cards.

The audio card 12 converts the analog signals received from the communication lines 39 from analog to digital and will transmit the signals onto the TDM bus 16 under control of the main card 14. The main card 14 monitors the status of the audio cards 12a, 12b to see which audio card needs service and upon responding thereto, the audio is sent over the TDM bus 16. The main card 14 can be of the type shown and described in copending European application number 554626 and entitled Time Divisions Multiplexer Chip which is hereby incorporated by reference. As stated previously, only two audio cards 12 are shown in FIG 1, but more audio cards can be added to the system as required. The main card 14 receives the digital audio signals from the audio cards 12 and compresses the data, as for example from 64K bits per second to 13K bits per second of audio and packages the audio into 2048 byte messages. This data is then sent across the ISA bus 22 to the CPU 20 that serves as a traffic director for the entire system 10. The data is stored on the RAM 23 prior to being transmitted to SCSI host adapter 18 and onto the tapes 28 and discs 32 where the data is stored permanently.

Because DAT tapes are relatively fast compared to channel data rates i.e., the DATs are capable of receiving data faster than data is digitized by the system, the data is first written into and stored on the RAM 23 and will be transmitted to the DATs 28 at a rate that is compatible with the capability of the DATs. At the same time, data is written into the discs 32. The

two tapes 26a, 26b can be used either independently to achieve greater capacity or simultaneously to achieve redundancy. When used independently, more data can be written in the tapes. When they are used simultaneously, one tape 28a will serve as a backup for the other tape 28b. In this way, if either of the tapes is destroyed for any reason, there is always a backup. The discs 32a, 32b duplicate what is recorded on each of the DATs 28. Clearly, if the DATs 28a, 28b are being used in a redundant manner, only one disc 32 is required to record the audio. In fact, one disc 32 can be partitioned with a portion duplicating the data on one DAT 28a and the other portion duplicating the data on a second DAT 28b when the DATs are run sequentially. The primary function served by the disc 32 is to allow one to listen to previously written recorded data without interfering with the functions of the DATs 28. In addition, the discs 32a, 32b can serve the function of back-ups for the DATs 28a, 28b.

When one wishes to listen to audio that had been recorded at a particular time, this can be accomplished by inputting a request to the CPU 20 requesting that a message on a particular channel and at the given time be delivered over the speaker 41.

The time data is stored on the DATs 28 and discs 32 under control of the CPU 20. An input is made into the system 10, as by a network or serial port connection for the time and channel for a particular message. The host adaptor 18 will search the disc 32 for the address of the specific time and channel and will retrieve the audio from the disc 32. While this is occurring, the DATs 28a, 28b are capable of continuing to record audio.

The audio recovered from the disc 32a will be transmitted to the main card 14 where decompression will take place and the data will be expanded, as for example, from 13K bits per second to 64K bits per second. The data will then be transmitted to the audio card 12b where it will be converted from digital to analog and eventually will be heard over the speaker 41.

With reference to FIG 2, a plan view is shown of a system 10 that demonstrates the modularity of the system 10 and how its capacity can be readily expanded as required. A housing 52 has a base 54 that receives the various cards of the system as will be described. One or more main cards 14a, 14b will be received within and supported by the base 54, as will a plurality of audio cards 12a, 12b. Once more, although three audio cards 12 are shown, it will be appreciated that a greater or lesser number can be used and one main card is capable of monitoring and servicing a plurality of audio cards, two as shown in FIG 1. Each main card 14 will be connected logically to an audio card 12a, but it is not necessary that the audio card be connected physically to the main card to which it is attached logically because of the TDM function of the system. In addition, an audio card 12c, can be physically attached to a dummy card 34 that

can provide an electrical connection but no logic. Thus, one main card 14a can be connected logically through the TDM bus 16 to two audio cards 12a, 12c.

The housing base 54 also supports the CPU 20 which is connected with the main cards 14 through the bus 16. The SCSI adaptor 18 is in communication with the main cards and with the CPU 20 through the ISA bus 22. In this way, cards 12a, 14 can be added or eliminated from the system 10 in accordance with requirements thereof because of the time division multiplexing capability of the system. As a main card 14 and audio card 12 are added they will be connected to the appropriate busses and supported by the base 54. The base 54 also supports a clock buffer 58 that provides timing for the TDM bus and provides additional drive for the ISA bus and the components attached thereto.

With reference to FIG 3, an overall view is shown as to how the invention can be networked to include a number of systems 10 nodes and workstations 60. Where a large number of telephone conversations are to take place and recorded, as for an example at a brokerage firm, a large number of conversations need to be recorded, as for example 180. In this instance, one system 10 would not be capable of servicing that large number of calls. As seen, a plurality of workstations 60 are connected to a LAN bus 64 as are in a plurality of nodes 10. Each workstation is a personal computer 60 with a main card 14, an audio card 12 and a LAN adapter 62. A speaker 41 is attached to each workstation 60. In addition, the number of workstations 60 can be increased so that access to the systems 10 at a number of different locations can be achieved and one would be able to monitor and have access to any audio data as required. When audio is to be retrieved, the processing will take place in a node 10 as described previously with the exception that compressed audio is sent by the LAN adapter 24 over the LAN bus 62 and received by the LAN adapter 26 of the requesting workstation 60. The compressed data is then processed by the main/audio cards, 14, 12 and subsequently audio is heard over the speaker 41.

Thus, what has been shown and described is a digital recording logger that is modular in construction, is capable of using digital audio tapes in an effective manner and can be networked to provide a plurality of workstations and nodes.

The above embodiments have been given by way of illustration only, and other embodiments of the instant invention will be apparent to those skilled in the art from consideration of the detailed description. Accordingly, limitations on the instant invention are to be found only in the claims.

## Claims

1. A voice recording system comprising:
  - an audio processor for receiving audio data,
  - a time division multiplexed (TDM) bus in communication with said audio processor,
  - an application signal processor in communication with said TDM bus,
  - a bus in communication with said application processor,
  - a computer and a small computer system interface (SCSI) adapter in communication with said bus, and
  - a digital audio tape drive in communication with said SCSI adapter.
2. The system of Claim 1 further comprising a clock in communication with said computer.
3. The system of Claim 1 further including a disc drive in communication with said SCSI adapter.
4. The system of Claim 2 further comprising a speaker in communication with said audio processor.
5. A modular digital recording logger comprising:
  - a housing having a base therein,
  - an audio circuit board having a plurality of ports received by said floor,
  - an application processing circuit board received and supported by said base,
  - a time division multiplexed bus supported by said housing and providing communication between said audio circuit board and said application processing board,
  - an ISA bus in communication with said application processing board supported by said housing,
  - a computer and a small computer system interface (SCSI) adapter board supported by said housing and in communication with said ISA bus, and
  - a digital audio tape drive in communication with a processor in said SCSI adaptor.
6. The logger of Claim 5 wherein said communication between said digital audio tape drive and said SCSI adapter is a SCSI bus.
7. The logger of Claim 6 further including a disc drive in communication with said SCSI bus.
8. The logger of Claim 7 further including a clock in communication with said computer.
9. The logger of Claim 7 further including a speaker

supported by said housing and in communication with said audio circuit board.

10. A logger network system comprising:

- a workstation having a main card, an audio card and a LAN adapter, 5
- a speaker in communication with said workstation,
- a bus in communication with said workstation, 10
- a plurality of nodes in communication with said bus, each node comprising:
  - an audio processor for receiving audio data,
  - a time division multiplexed (TDM) bus in communication with said audio processor, 15
  - an application signal processor in communication with said TDM bus,
  - a bus in communication with said application processor, 20
  - a computer and a small computer system interface (SCSI) adapter in communication with said bus, and
  - a digital audio tape drive in communication with said SCSI adapter. 25

30

35

40

45

50

55

**FIG. 1**

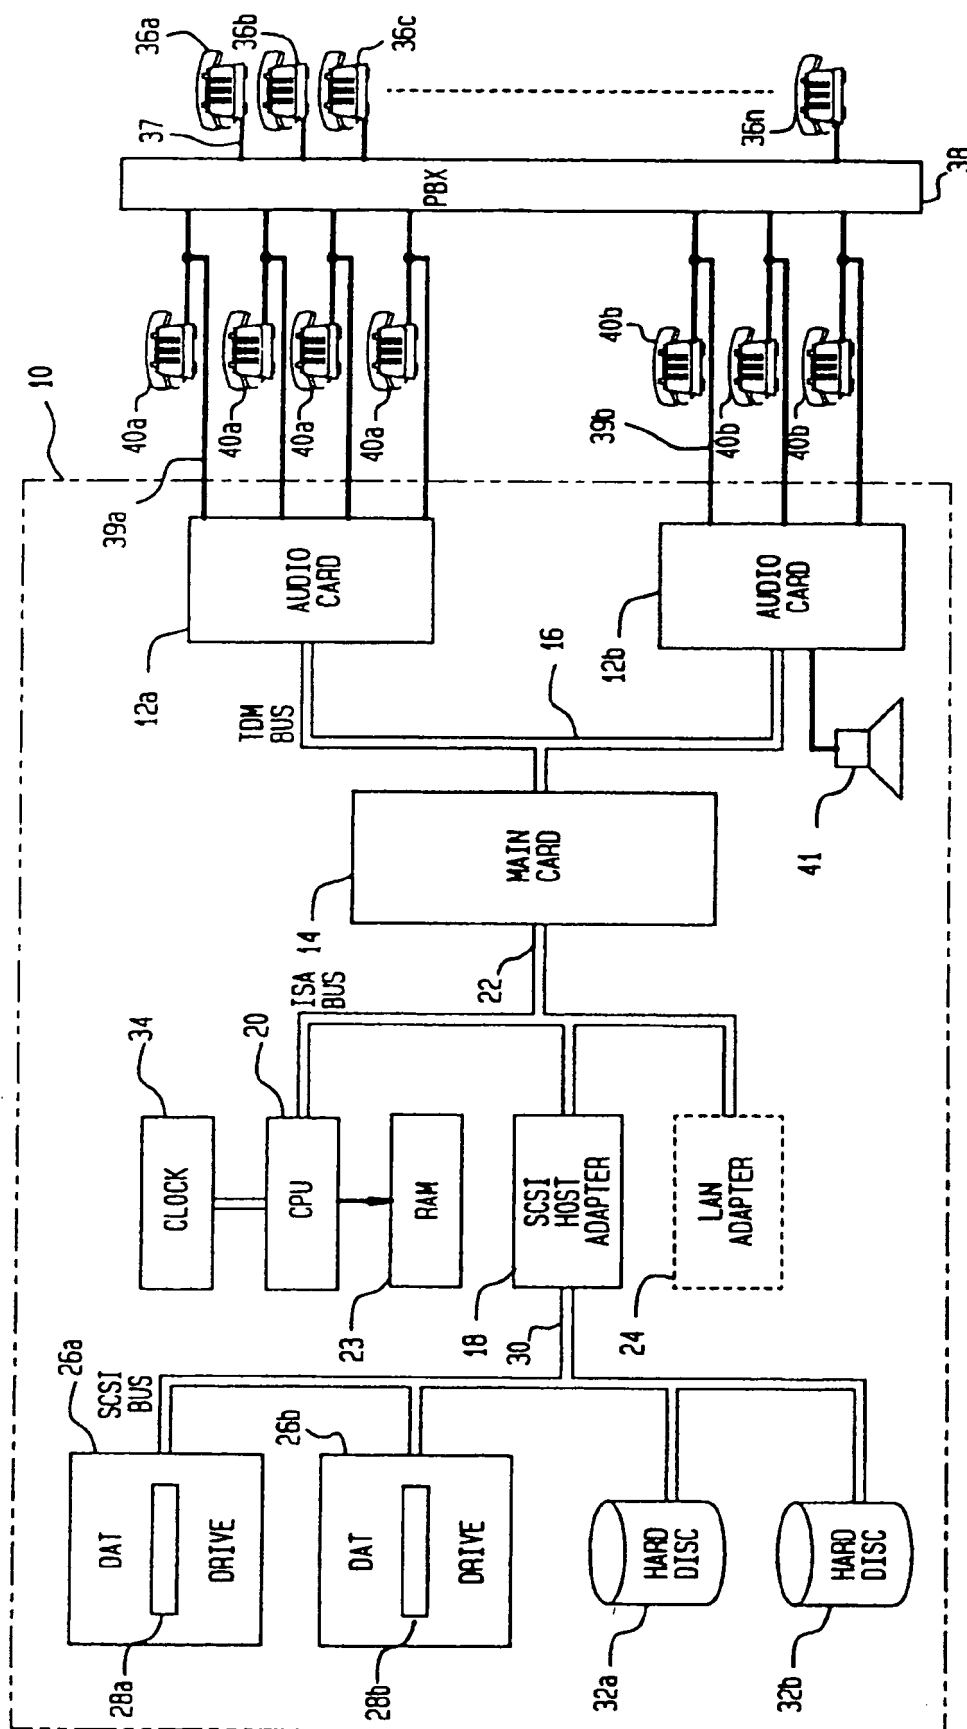


FIG. 2

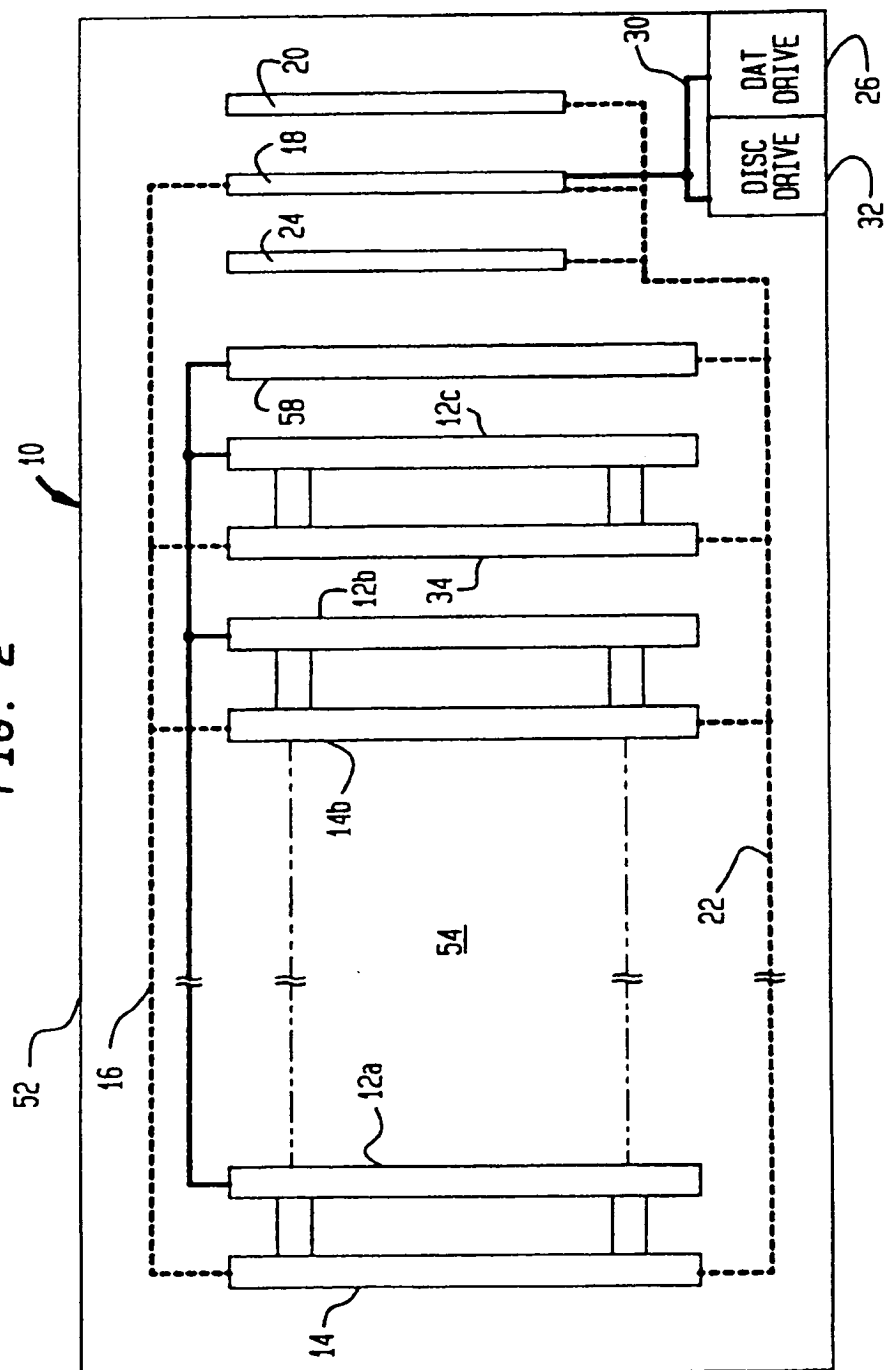


FIG. 3

